




DEMI DEKK ULTIMATE



TWELVE YEAR PROTECTION

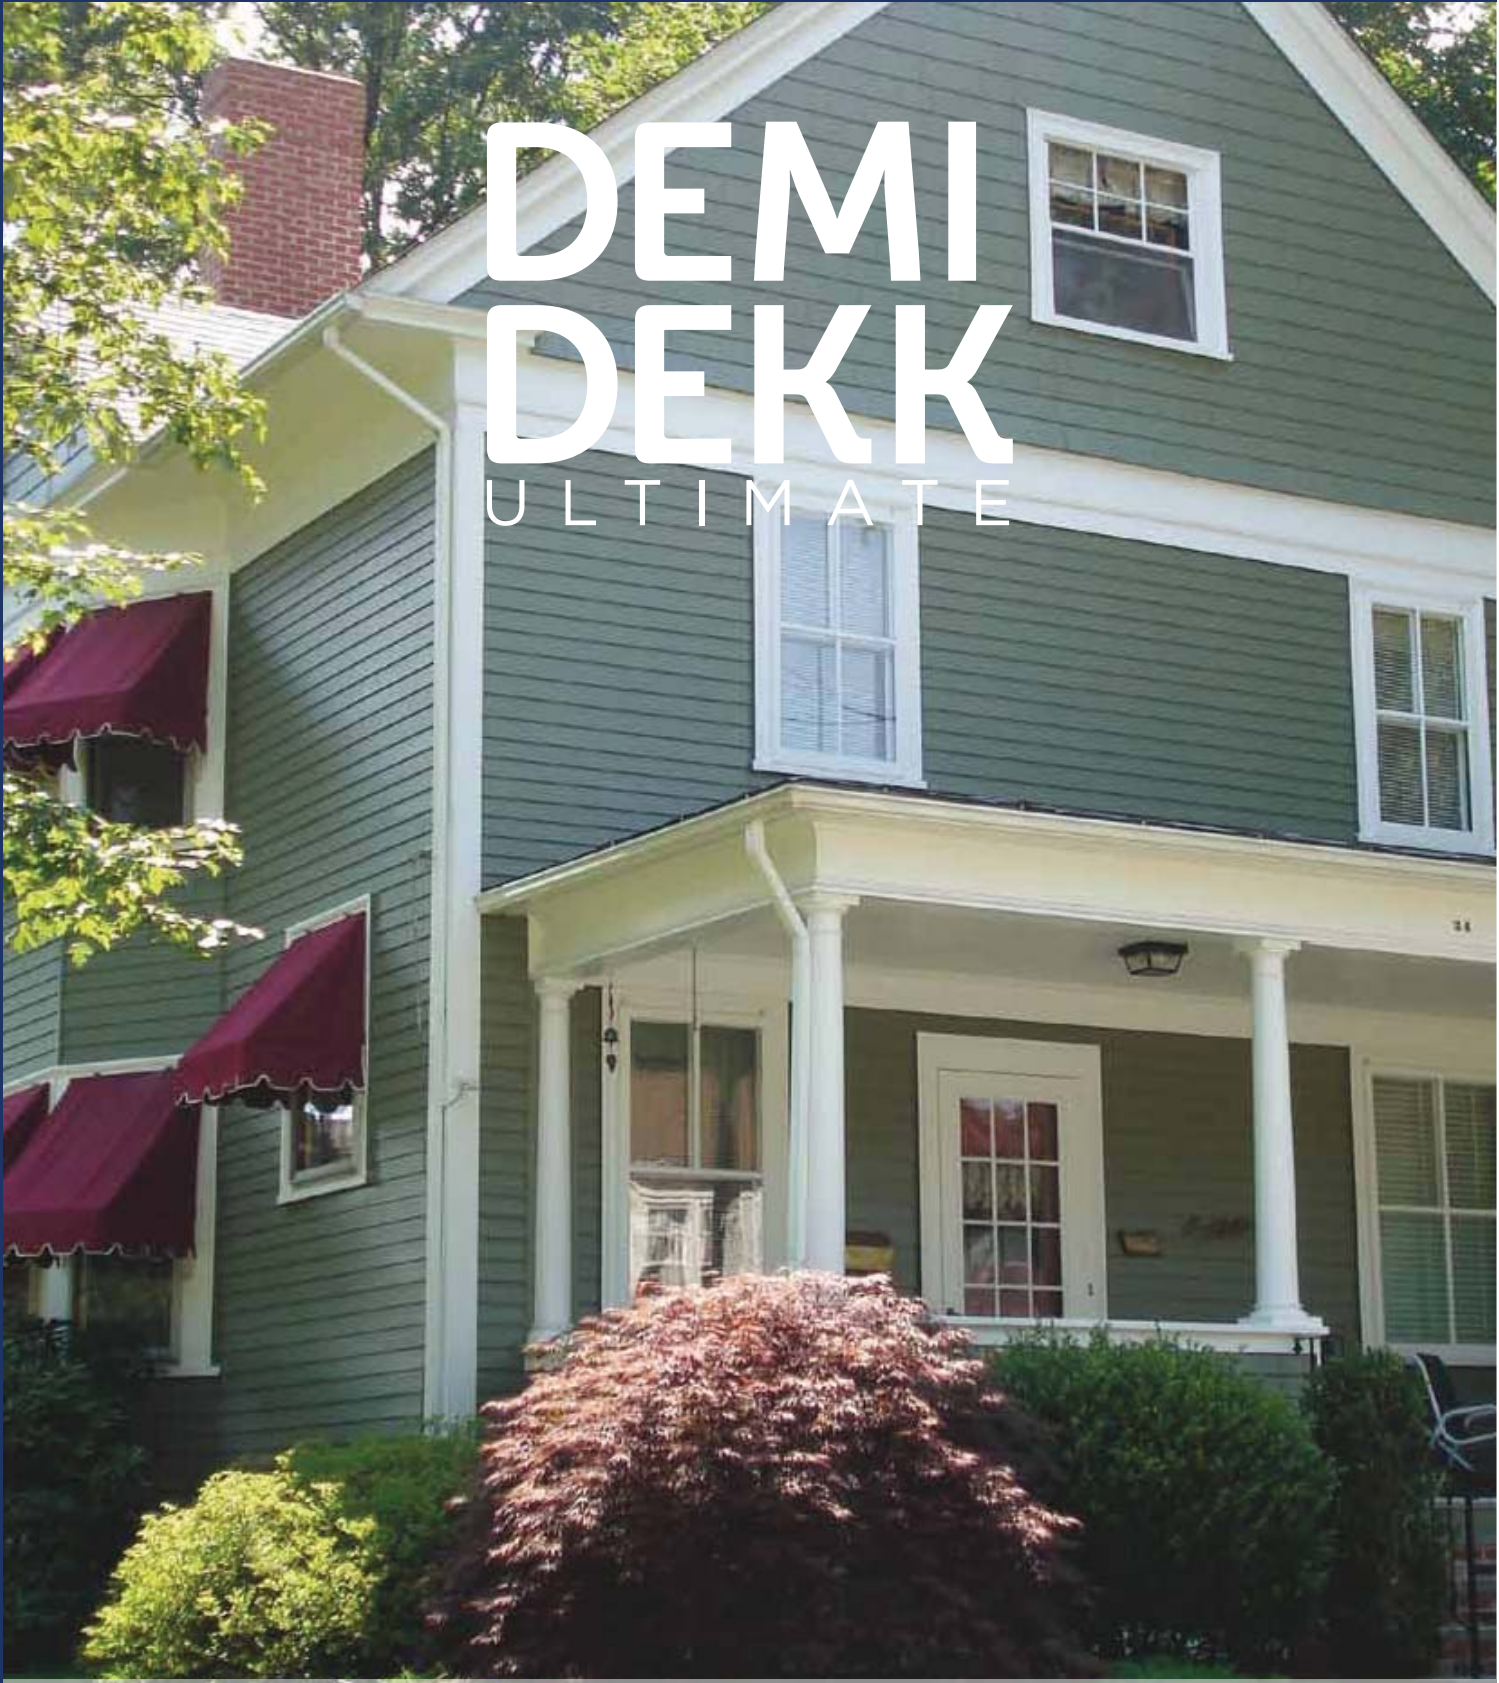

Ultimate™ Professional Exterior Wood Stain

The most technically advanced exterior wood stain in its class

Ultimate™, as its name suggests, delivers the definitive durable finish without compromising looks or the environment, which is why it is proving a popular choice with architects and specifiers requiring a high performing product.

Formulated for durability, this technically superb exterior wood stain boasts a maintenance cycle of 12 years, while ensuring the same integrity and lustre throughout its long life.

Its advanced waterbourne system and exceptionally low Volatile Organic Compound (VOC) rating – the lowest of any stain available on the market today – means the impact on the environment is minimal, both immediate and over the long term. The ultra low VOC rating also makes Ultimate one of the safest stains available; air quality is preserved and incidents of eye and respiratory irritation, caused by exposure to fumes, is virtually non-existent.

Architects will appreciate the versatile colour palette, incorporating both traditional and contemporary hues and offering inspirational and dynamic colour choices. From subtle tones to bright and bold contemporary colours, the palette offers the ultimate in creative freedom.

Tough, durable and beautiful, Ultimate™ is a natural choice for architects or anyone who wants lasting performance without compromise.



Exterior Joinery – new woodwork, pressure impregnated timber and previously painted woodwork.

Drying Times at +23 °C

Touch dry: 2h

Recoatable: 8h, but dependent on temperature and humidity this can be less

Coverage

Sawn timber: 7-10m²/litre

Planed timber: 10-12m²/litre

Maintenance Cycle

Up to 12 years provided application is in accordance with our guidance.

Application method

Brush, roller or airless spray.

Sizes

1l, 3l and 10l cans





White
001



Fountains
S0507-Y



Hardwick
S0804-G60Y



Old Cream
S0510-Y10R



Travertina
S0505-Y10R



Ochre Cream
S1515-Y20R



Twine
S2010-Y30R



Portland Stone
S2005-Y



Swedish Grey
S4005-Y50R



Pale Lichen
S1510-G20Y



Sage Silk
S2010-G30Y



Summerhouse
S5010-B90G



Ground Pink
S2005-Y70R



Plaster
S3010-Y70R



Old Fresco
S3020-Y90R



Pale Pearl
S1010-R80B



Delft
S2020-R90B



Bell Blue
S3010-R90B



Old Ochre
S2010-Y40R



Earthy Ground
S3020-Y50R



Tudor Terracotta




Wainscots
S8010-Y50R



Drum Red
S5040-R



Cedar Earth
S5040-Y70R



Belvedere Blue
S7020-R90B



Bothy Green
S7020-G10Y



Blackened Black
S8500-N

Ultimate™ Windows and Doors

The most environmentally friendly exterior wood stain in its class

Demidekk Ultimate Windows and Doors is a waterborne exterior wood protection coating with very good colour stability and long maintenance cycles. Especially suited for smooth woodwork such as windows, doors, window frames, guttering, and other outdoor details.

The product contains film preserving agents, which combat surface fungi build-up on the substrate. Use as a system together with Visir Primer products.

Easy to apply with a long-lasting colour and shine. Good adhesive properties. Demidekk Ultimate Windows and Doors may be used on new woodwork and previously painted and stained woods as well as pressure impregnated wood. The product may also be used as a topcoat for plastic and metal objects if used with a suitable primer.



Exterior Joinery – new woodwork, pressure impregnated timber and previously painted woodwork.

Drying Times at +23 °C

Touch dry: 2h

Recoatable: 4h

Coverage

Sawn timber: 6-9m²/litre

Planed timber: 10-12m²/litre

Maintenance Cycle

Up to 12 years provided application is in accordance with our guidance.

Application method

Brush, roller or airless spray.

Sizes

1l and 3l cans





Jotun Paints (Europe) Ltd
Stather Road
Flixborough, Scunthorpe
North Lincolnshire
DN15 8RR

**Jotun Decorative Orders
and Customer Services**
Telephone: +44 (0)1724 400 000
Fax: +44 (0)1724 400 130
Email: deco.uk@jotun.co.uk

Our paints comply with European
Commission VOC product directive
2004/42/CE, which limits the VOC content
of paints. Our water based paints already
comply with the 2010 limits set by the EU.



Jotun Protects Property